

# BEMO PMC Ceiling Systems



Panel and Pattern Specifications



Pattern Name:


## Weave

Punch Size: .25"  
Open Area: 31.5%

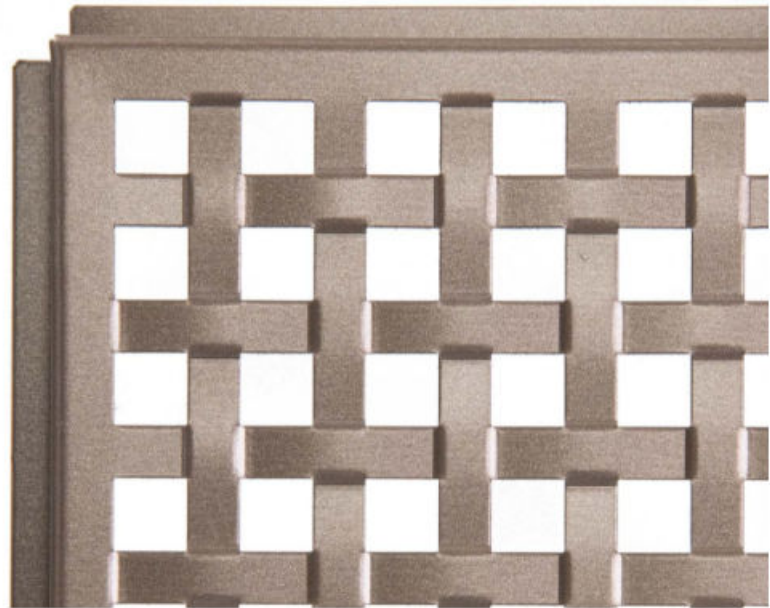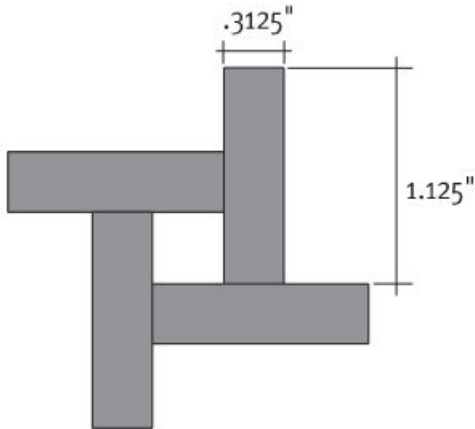

### Standard Materials:

- 22 ga and 24 ga steel
- .032, .040, .050 aluminum
- Custom metals available



Panel Sizes Available: 2' x 2', 2' x 4', 1' x 6', 2' x 6', custom



Standard Suspension Systems: 9/16", 15/16"



Panel Shape: Flat Lay-in, Tegular

### Standard Colors\*:



\* Colors are for reference only. For accurate color selection, contact your Bemo representative for a color chip.

**Finishes:** Materials are pretreated, primed and, roller-coil coated with a 1.0 mil total dry film thickness (.2 mil primer with a .8 mil topcoat). The reverse side is coated with a wash coat of .4 to .5 mil dry film thickness.

More than **20 standard colors** are available, plus **6 premium colors** (special order). A variety of wood grain and mill finishes are also available. Ask your Bemo representative for details.



**Bemo USA Corporation**

1755 N. 48th Street, Mesa, Arizona USA 85205 | 480-545-7900

visit [www.bemousa.com](http://www.bemousa.com). For more information call or email at [techservices@bemousa.com](mailto:techservices@bemousa.com).